

# VS 600-36

TECHNICAL DATASHEET

# VS 600-36

## Technical Data

Dimensions 350 mm x 320 mm x 90 mm [B x T x H]  
13.78 in x 12.60 in x 3.55 in [B x T x H]

Control 0 - 10 V, DALI, DMX, POT, IOT

Input Voltage Power supply: internal |  
85 - 264 VAC (50 - 60 Hz) | 120 - 370 VDC

Power Consumption Max. 660 W

Power Factor Correction > 0,94

Protection Class I

Output Voltage 36 VDC

Inrush COLD START 70A(t=1000 s measured at 50% I) at 230VAC; width peak Per NEMA 410  
COLD START 35A(t=1000 s measured at 50% I) at 110VAC; width peak Per NEMA 410

Operating Temperature -20 °C / +40 °C | -4 °F / +104 °F

Housing Steel-sheet, powdercoated

Housing Color(s) White (RAL 9010)

Weight 8,1 kg (17.86 lbs)

Ingress Protection IP20

Environment






indoor

Certification



# Engineering Drawing

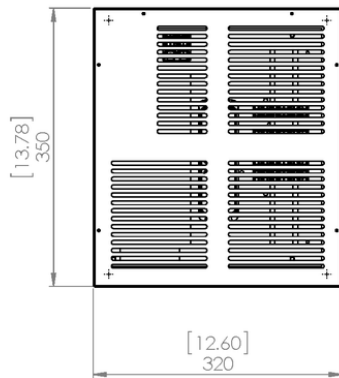

Dimensions are in millimeters [inch]  
All product specifications are subject to change without prior notice.



Description	VS 600 tunableWhite	Scale	1:5
	Abmessungen / Dimensions	Pagesize	A4
Revision		Page	1/2





Lindberghstrasse 15  
86343 Koenigsbrunn  
Tel: +49 (0)8231/95787-0  
Fax: +49 (0)8231/95787-29  
[www.biontechnologies.com](http://www.biontechnologies.com)  
[info@biontechnologies.com](mailto:info@biontechnologies.com)

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2023, BION TECHNOLOGIS GMBH  
All rights reserved / Subject to change / Specifications may change without notice